



---

# Calculation of Baseline Emissions for Biomass Project


---

July 8, 2008


Umarat Santisukkasaem  
Thailand Environment Institute



# Example: Palm Oil Mill

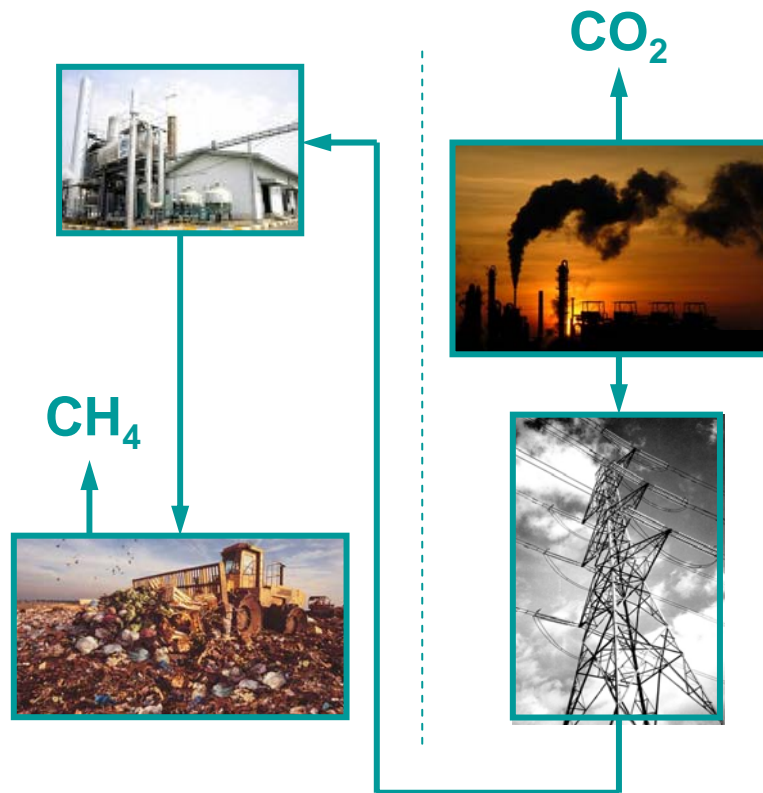

Without CDM project

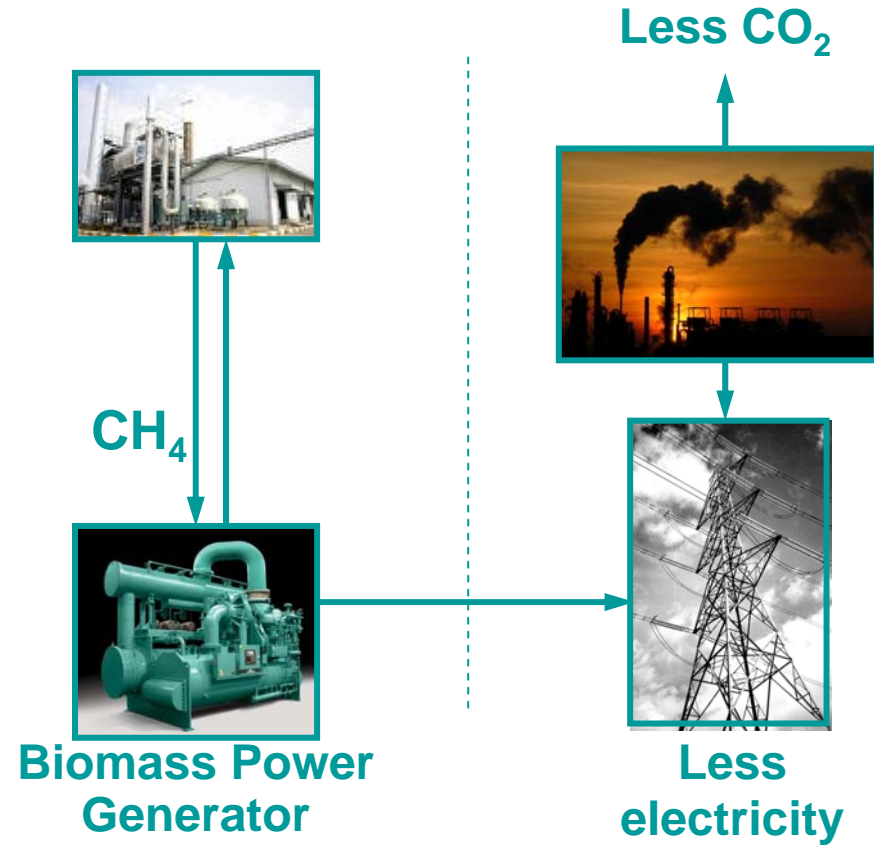

With CDM project



# How does “Biomass project” reduce GHG?



- **Avoid CH<sub>4</sub> emission by preventing biomass from anaerobic decay (AMS III.E.)**
  - Controlled combustion
  - Gasification to produce synthetic gas/producer gas
  - Mechanical/thermal treatment to produce refuse-derived fuel (RDF) or stabilized biomass.
  
- **Reduce fossil fuel consumption by generating renewable energy**
  - Reduce coal by generating steam from wood chips
  - Reduce diesel oil for in-house power generation by utilizing rice-husk for power generation
  - Reduce power generation of thermal power plant by supplying power to the grid



# Required Conditions



- **Generating renewable energy**
    - the biomass must fit the EB definition of “biomass” which is categorized as “*renewable biomass*”
  
  - **Preventing biomass from anaerobic decay**
    - the biomass must emit CH<sub>4</sub> in anaerobic conditions
-



## What is “renewable biomass”?



**Biomass is “renewable” when it is..**

- originating from land areas that are forests,
- woody biomass and originates from croplands and/or grasslands,
- non-woody biomass and originates from croplands and/or grasslands,
- biomass residues, or
- non-fossil fraction of an industrial or municipal waste.

**Biomass is “non-renewable”, if the use of the biomass leads to the decrease in carbon stock.**

**Examples:**

- Use of dead wood from the forest that would otherwise have remained unused.
  - Unsustainable forest harvesting and biomass utilization.
-



# What is “biomass” in CDM?



## ■ Biomass:

- non-fossilized and biodegradable organic material originating from plants, animals and micro-organisms
- products, by-products, residues and waste from agriculture, forestry and related industries as well as the non-fossilized and biodegradable organic fractions of industrial and municipal wastes
- gases and liquids recovered from the decomposition of non-fossilized and biodegradable organic material (EB20)

## ■ Biomass residues:

- biomass by-products, residues and waste streams from agriculture, forestry and related industries (EB20)
-



# Overview on Emission Sources



สถาบันสิ่งแวดล้อมไทย  
Thailand Environment Institute

| Biomass Type  | Source   | Shift of pre-project activities | Emissions from biomass generation/cultivation | Competing use of biomass |
|---|--|---------------------------------|---|--------------------------|
| Biomass from forests                                      | Existing forests   | -                               | -   | X                        |
|   | New forests  | X                               | X   | -                        |
| Biomass from croplands or grasslands (woody or non-woody) | In the absence of the project the land would be used as cropland/wetland | X                               | X   | -                        |
|   | In the absence of the project the land would be abandoned                | -                               | X   | -                        |
| Biomass residues or wastes                                | Biomass residues or wastes are collected and used                        | -                               | -   | X                        |



# Competing uses for biomass



- **The biomass would be used even in baseline scenario?**
    - ❑ *No → No leakage (to be deducted from the emission reduction.)*
    - ❑ *Yes → Some leakages (if the project activity cause additional use of fossil fuel.)*
  
  - Even “Yes”, no leakage would be considered if there is a surplus of the “unused” biomass in the region of the project activity
  
  - If it is demonstrated that the quantity of available biomass in the region (e.g. 50 km radius), is at least 25% larger than the quantity of biomass that is utilized including the project activity, then this source of leakage can be neglected. (EB28)
-



# Baseline Emissions



$$BE_y = BE_{CH_4,SWDS,y} + BE_{power,y}$$

**BE<sub>y</sub>** Baseline emissions at year “y” during crediting period (tCO<sub>2</sub>e)

**BE<sub>CH<sub>4</sub>,SWDS,y</sub>** Yearly Methane Generation Potential of the wastes diverted to be disposed in the landfill from the beginning of the project (x=1) up to the year “y”, calculated according to the “Tool to determine methane emissions avoided from dumping waste at a solid waste disposal site” (tCO<sub>2</sub>e).

**BE<sub>power,y</sub>** CO<sub>2</sub> emissions that would otherwise occur at the fossil fuel power plants of the grid, which the project activity would supply electricity, to generate the electricity to be replaced by the project activity.



# Project Emissions



$$PE_y = PE_{y,comb} + PE_{y,transp} + PE_{y,power}$$

|                 |   |
|-----------------|---|
| $PE_y$          | Project activity direct emissions in the year “y” (tCO <sub>2</sub> e)  |
| $PE_{y,comb}$   | Emissions through combustion and gasification of non-biomass carbon of waste and RDF/SB in the year “y”(tCO <sub>2</sub> e) |
| $PE_{y,transp}$ | Emissions through incremental transportation in the year “y”(tCO <sub>2</sub> e)  |
| $PE_{y,power}$  | Emissions through electricity or diesel consumption in the year “y”(tCO <sub>2</sub> e)                                     |

$$PE_{y,comb} = Q_{y,non-biomass} * 44/12 + Q_{y,fuel} * EF_{y,fuel}$$

|                     |  |
|---------------------|--|
| $Q_{y,non-biomass}$ | Non-biomass carbon of the waste and RDF/SB combusted/gasified in the year “y” (tonnes of carbon)   |
| $Q_{y,fuel}$        | Quantity of auxiliary fossil fuel used in the year “y” (tonnes)  |
| $EF_{y,fuel}$       | CO <sub>2</sub> emission factor for the combustion of the auxiliary fossil fuel (tonnes CO <sub>2</sub> per tonne fuel, according to latest IPCC Guidelines) |



# Project Emissions (Cont.)



สถาบันสิ่งแวดล้อมไทย  
Thailand Environment Institute

$$PE_{y,transp} = (Q_y / CT_y) * DAF_w * EF_{CO_2} + (Q_{y,ash} / CT_{y,ash}) * DAF_{ash} * EF_{CO_2} + (Q_{y,RDF/SB} / CT_{y,RDF/SB}) * DAF_{RDF/SB} * EF_{CO_2}$$

|                 |  |
|-----------------|--|
| $Q_y$           | Quantity of waste combusted, gasified or mechanically/thermally treated in the year “y” (tonnes)                                       |
| $CT_y$          | Average truck capacity for waste transportation (tonnes/truck)   |
| $DAF_w$         | Average incremental distance for waste transportation (km/truck)   |
| $EF_{CO_2}$     | CO <sub>2</sub> emission factor from fuel use due to transportation (tCO <sub>2</sub> /km, IPCC default values or local values)        |
| $Q_{y,ash}$     | Quantity of combustion and gasification residues and residues from mechanical/thermal treatment produced in the year “y” (tonnes)      |
| $CT_{y,ash}$    | Average truck capacity for residues transportation (tonnes/truck)  |
| $DAF_{ash}$     | Average distance for residues transportation (km/truck)  |
| $Q_{y,RDF/SB}$  | Quantity of RDF/SB produced in the year “y” (tonnes)   |
| $CT_{y,RDF/SB}$ | Average truck capacity for RDF/SB transportation (tonnes/truck)  |
| $DAF_{RDF/SB}$  | Aggregate average distance for RDF/SB transportation to the storage in the production site as well as to the end user sites (km/truck) |



# Exercises



- **Project type:**
    - Grid-connected biomass power generation
  - **The emission reduction activities:**
    - Avoid CH<sub>4</sub> emission from biomass decay (in anaerobic condition)
    - Displace electricity from the power grid
  - **Methodologies:**
    - Type III.E. “Avoidance of methane production from decay of biomass through controlled combustion”
    - Type I.D. “Grid connected renewable electricity generation”
-



# Exercises (Continue)



- **Assumptions for Calculation: Project Emissions**
    - **CO<sub>2</sub> emissions through combustion of non-biomass carbon**
      - Non-biomass carbon is not included in the biomass
      - 100 t of Diesel oil will be used as auxiliary fuel annually.
    - **CO<sub>2</sub> emissions through incremental transportation of biomass to the project site**
      - Biomass to be used by the project activity: 100,000 ton/year
      - Approximate loading capacity for a truck: 10 ton/truck
      - Average distance to the power plant: 50 km (one way)
      - No combustion residue will cause incremental transportation.
    - **CO<sub>2</sub> emissions through electricity or fossil fuel consumption**
      - No electricity/diesel is consumed by the project activity other than auxiliary fuel.
-



# Exercises (Continue)



- **Assumptions for Calculation: Baseline Emissions**
  - **CH<sub>4</sub> emissions avoided from preventing waste (biomass) disposal at the SWDS**
    - It is assumed that the biomass residues are either dumped or left to decay under mainly aerobic conditions without utilizing it for energy purposes.
    - Biomass used by the project activity: 100,000 tonne/year
    - The SWDS is categorized as “Unmanaged-shallow solid waste disposal site” (MCF = 0.4)
    - The type of the biomass is “Wood and wood products”
  - **CH<sub>4</sub> emissions that would be captured and destroyed to comply with national requirements etc.**
    - Any of the requirements will not be established during the crediting period.
  - **Emission reductions due to displacement of electricity (AMS-I.D)**
    - Grid emission factor: 0.58 tCO<sub>2</sub>/MWh
    - Power generation capacity: 1 MW
    - Load factor: 100%
    - Annual operation hours: 8,400 hours